



SteelCrete Access Floor

Product Guide



Data Center




SteelCrete Access Floor




With non-combustible concrete-and-steel composite structure, Dowseng® SteelCrete Access Floor is the strongest, most durable access floor system in the world.

"You leave yourself an enormous margin of safety. You build a bridge that 30,000-pound trucks can go across and then you drive 10,000-pound trucks across it. That is the way I like to go across bridges." -- Warren E. Buffett, Chairman of Berkshire Hathaway.

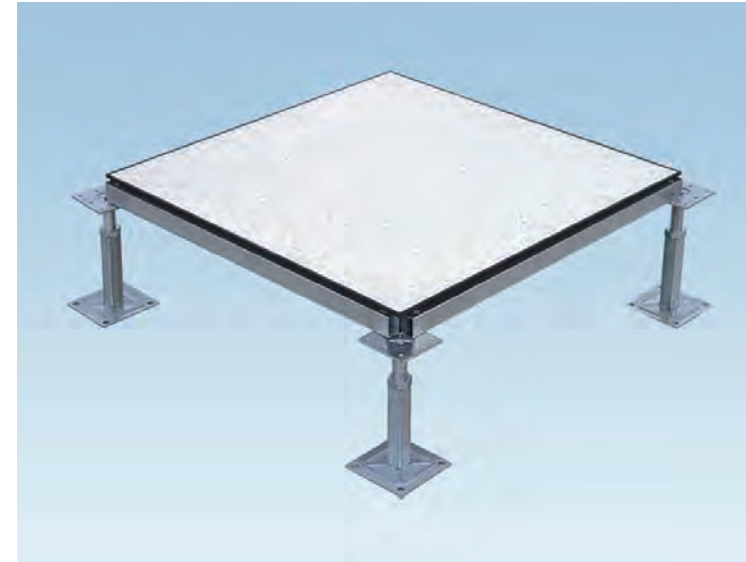


SteelCrete Bolted Stringer System for Data Center Applications

- HPL/Vinyl Finished SteelCrete Panel
- + Perforated Panel + Bolted Stringer System
- Designed for Data Center applications.

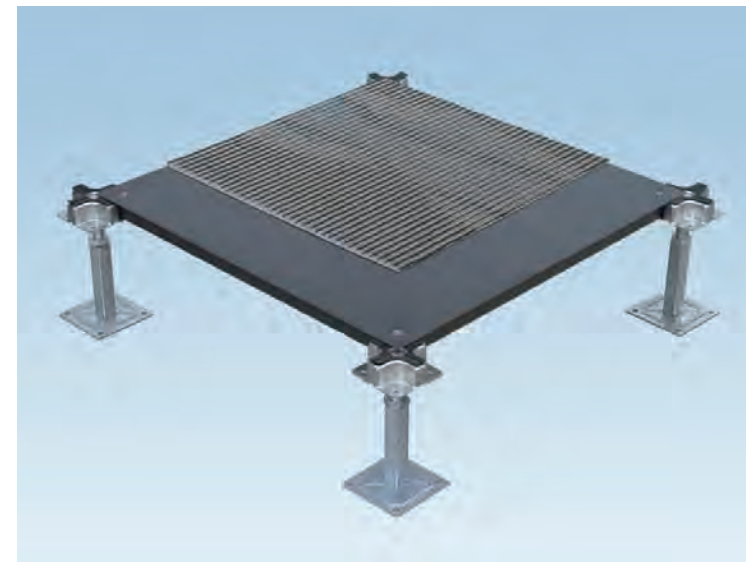

SteelCrete Corner Lock System for General Office Applications

- Bare Finished SteelCrete Panel
- + Corner Lock System
- Designed for General Office applications.

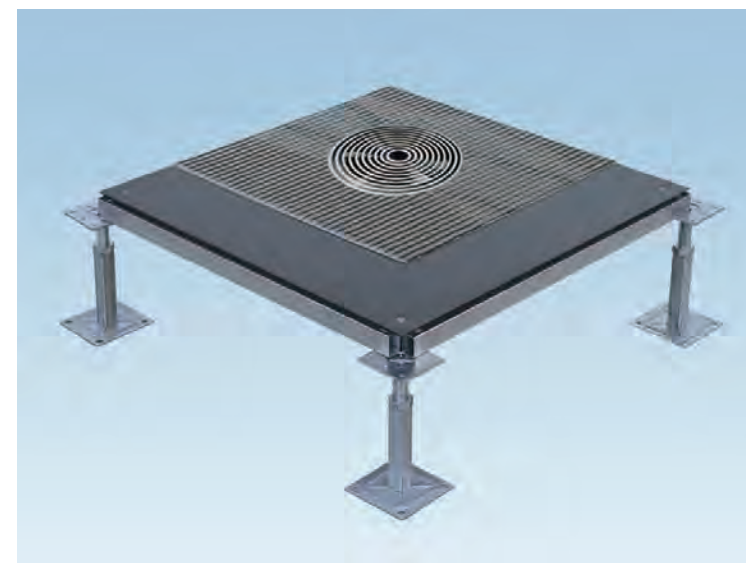


SteelCrete Bolted Stringer System for UFAD Applications

- Bare Finished SteelCrete Panel
- + Bolted Stringer System
- Designed for Underfloor Air Distribution applications.

SteelCrete Access Floor for Data Center



- Access floor panels with factory-bonded HPL finishes have become the standard in Data Center because of its ease of maintenance and its unique ability to dissipate static electricity.
- For strictly static sensitive applications, access floor panels with factory-bonded Vinyl finishes are better choices.

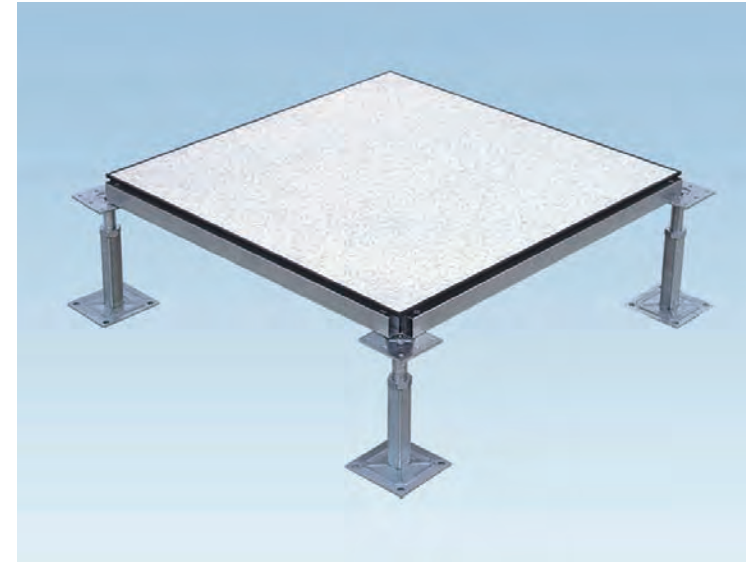


HPL/Vinyl Finished SteelCrete Panel + Perforated Panel + Bolted Stringer System

- Dimension: 600mm x 600mm or 24" x 24".
- SteelCrete panel grades: SC800, SC1000, SC1250.
- Wide range of HPL/Vinyl finishes.

HPL/Vinyl Finished SteelCrete Access Floor Performance Chart

General Information				Static Loads			Rolling Loads		Impact Loads
SteelCrete Panel	Top/Bottom Steel	Understructure	System Weight	Concentrated Loads	Ultimate Loads	Uniform Loads	10 Passes	10,000 Passes	
SC800	0.7/0.7mm	Bolted Stringer	10lbs/ft ² 48kg/m ²	800lbs 363kg	2400lbs 1089kg	300lbs/ft ² 14.35kPa	600lbs 272kg	500lbs 226kg	150lbs 68kg
SC1000	0.8/0.8mm	Bolted Stringer	10.6lbs/ft ² 51kg/m ²	1000lbs 454kg	3000lbs 1363kg	350lbs/ft ² 16.75kPa	800lbs 363kg	600lbs 272kg	150lbs 68kg
SC1250	0.8/1.0mm	Bolted Stringer	11.2lbs/ft ² 54kg/m ²	1250lbs 567kg	3750lbs 1701kg	400lbs/ft ² 19.1kPa	1000lbs 454kg	800lbs 363kg	150lbs 68kg

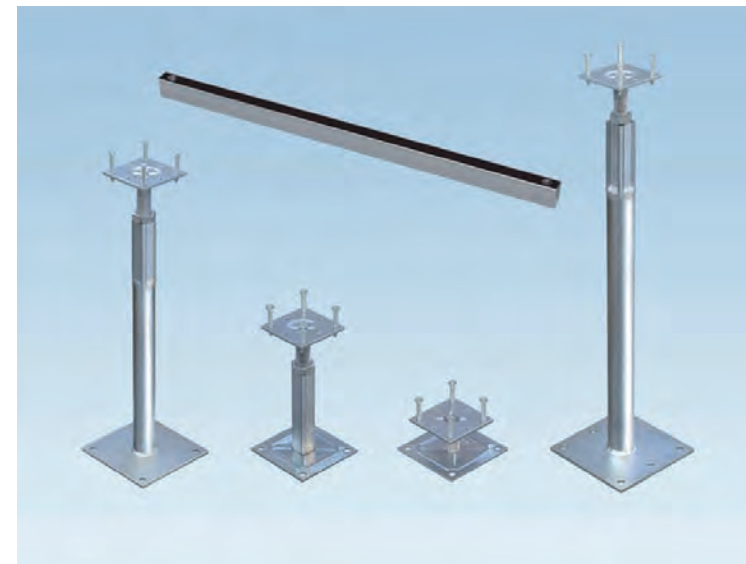

Bolted Stringer System



- Finished floor heights: 150mm ~ 1200mm.
- PVC taped rectangular stringer provides excellent loading and air-tightness performance.
- SteelCrete Access Floor is Zinc Whisker Free.



SteelCrete Access Floor for Data Center

Perforated Panel For SteelCrete Access Floor

- Perforated panel is specially constructed to allow for air flow distribution from under the raised access floor. In today's data center design, 45% airflow rate of perforated panel is the minimum requirement.

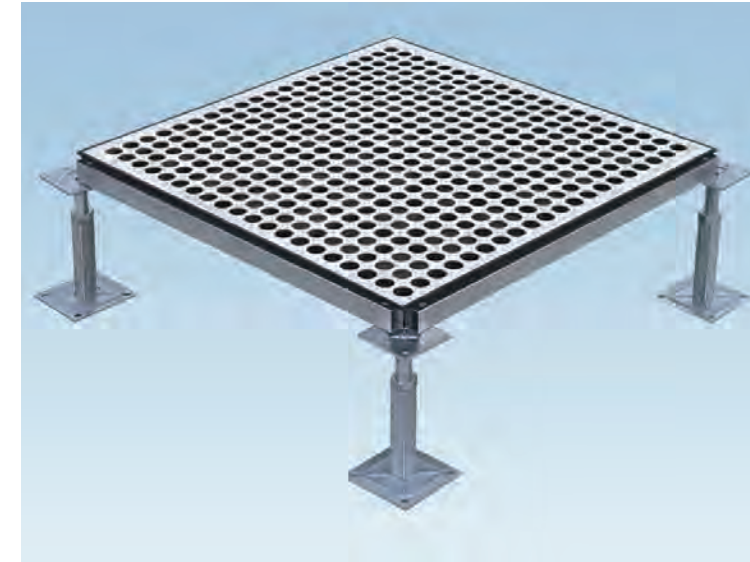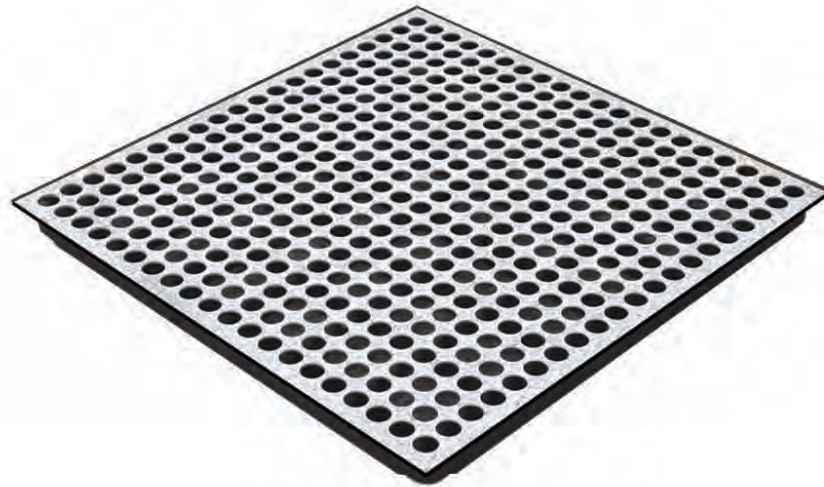


Bare/HPL/Vinyl Finished Perforated Steel Panel + Bolted Stringer System

- Dimension: 600mm x 600mm or 24" x 24".
- Perforated panel airflow rate 50%.
- Perforated panel grades: PERF1000.
- Wide range of HPL/Vinyl finishes.


SteelCrete Perforated Panel Performance Chart

General Information				Static Loads			Rolling Loads		Impact Loads
Perforated Panel	Top Steel	Understructure	System Weight	Concentrated Loads	Ultimate Loads	Uniform Loads	10 Passes	10,000 Passes	
PERF1000	2.0mm	Bolted Stringer	6.7lbs/ft ² 32kg/m ²	1000lbs 454kg	3000lbs 1363kg	350lbs/ft ² 16.75kPa	Not Recommended		150lbs 68kg

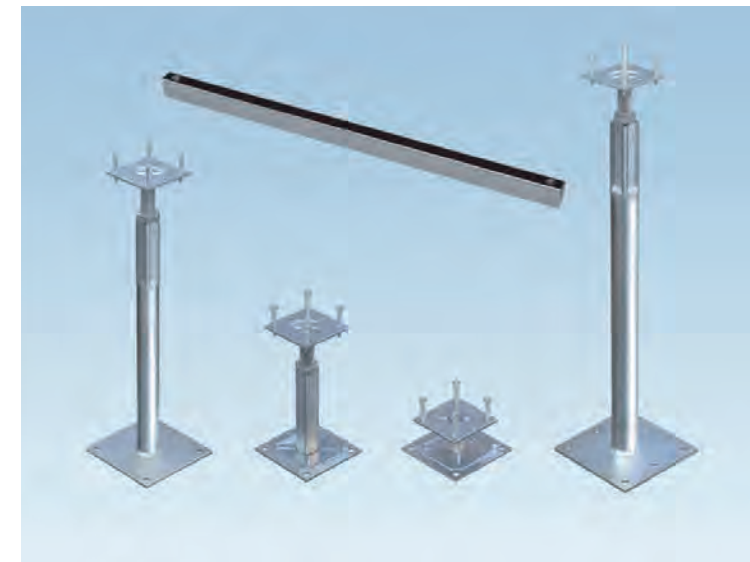

Bolted Stringer System


- Finished floor heights: 150mm ~ 1200mm.
- PVC taped rectangular stringer provides excellent loading and air-tightness performance.
- SteelCrete Access Floor is Zinc Whisker Free.

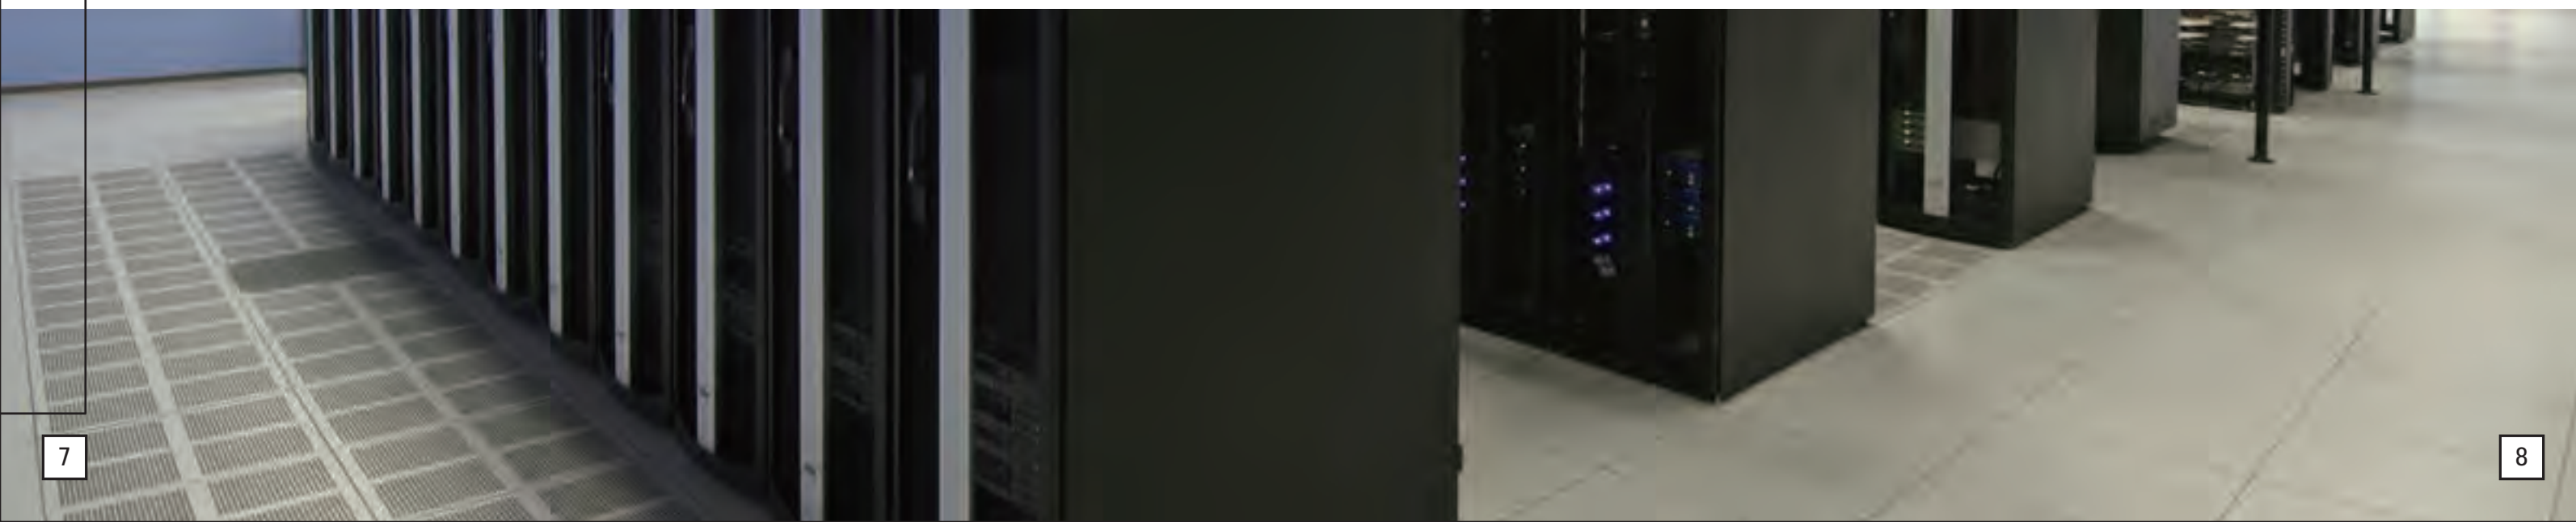

SteelCrete Access Floor for General Office



■ Raised access floor system is the basis of a flexible, high performance workplace. Where air flows cleaner and easier. Where technology adapts with ease. Where the infrastructure operates more cost-effectively than ever before. And where the workplace responds and changes at the speed of business.

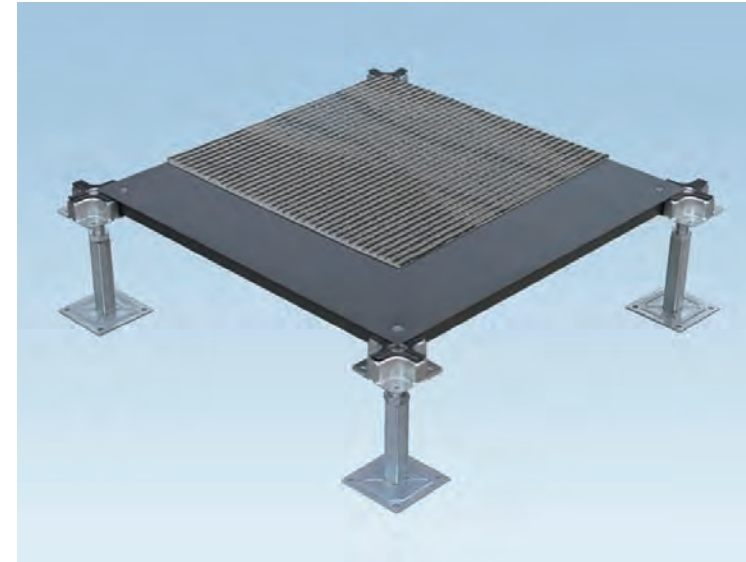

Bare Finished SteelCrete Panel + Corner Lock System

- Dimension: 600mm x 600mm or 24" x 24".
- SteelCrete panel grades: SC800, SC1000, SC1250.

Bare Finished SteelCrete Access Floor Performance Chart

General Information				Static Loads			Rolling Loads		Impact Loads
SteelCrete Panel	Top/Bottom Steel	Understructure	System Weight	Concentrated Loads	Ultimate Loads	Uniform Loads	10 Passes	10,000 Passes	
SC800B	0.7/0.7mm	Corner Lock	8.6lbs/ft ² 41kg/m ²	800lbs 363kg	2400lbs 1089kg	300lbs/ft ² 14.35kPa	600lbs 272kg	500lbs 226kg	150lbs 68kg
SC1000B	0.8/0.8mm	Corner Lock	9.2lbs/ft ² 44kg/m ²	1000lbs 454kg	3000lbs 1363kg	350lbs/ft ² 16.75kPa	800lbs 363kg	600lbs 272kg	150lbs 68kg
SC1250B	0.8/1.0mm	Corner Lock	9.8lbs/ft ² 47kg/m ²	1250lbs 567kg	3750lbs 1701kg	400lbs/ft ² 19.1kPa	1000lbs 454kg	800lbs 363kg	150lbs 68kg



Corner Lock System

- Finished floor heights: 75mm ~ 1200mm.
- SteelCrete Access Floor is Zinc Whisker Free.





SteelCrete Access Floor for Underfloor Air Distribution



- Underfloor Air Distribution systems are a general class of air distribution systems that deliver air through diffusers in the raised access floor, with the intent of maintaining comfort and indoor air quality levels only in the occupied lower portion of space.

Bare Finished SteelCrete Access Floor Performance Chart

General Information				Static Loads			Rolling Loads		Impact Loads
SteelCrete Panel	Top/Bottom Steel	Understructure	System Weight	Concentrated Loads	Ultimate Loads	Uniform Loads	10 Passes	10,000 Passes	
SC800B	0.7/0.7mm	Bolted Stringer	9.2lbs/ft ² 44kg/m ²	800lbs 363kg	2400lbs 1089kg	300lbs/ft ² 14.35kPa	600lbs 272kg	500lbs 226kg	150lbs 68kg
SC1000B	0.8/0.8mm	Bolted Stringer	9.8lbs/ft ² 47kg/m ²	1000lbs 454kg	3000lbs 1363kg	350lbs/ft ² 16.75kPa	800lbs 363kg	600lbs 272kg	150lbs 68kg
SC1250B	0.8/1.0mm	Bolted Stringer	10.4lbs/ft ² 50kg/m ²	1250lbs 567kg	3750lbs 1701kg	400lbs/ft ² 19.1kPa	1000lbs 454kg	800lbs 363kg	150lbs 68kg

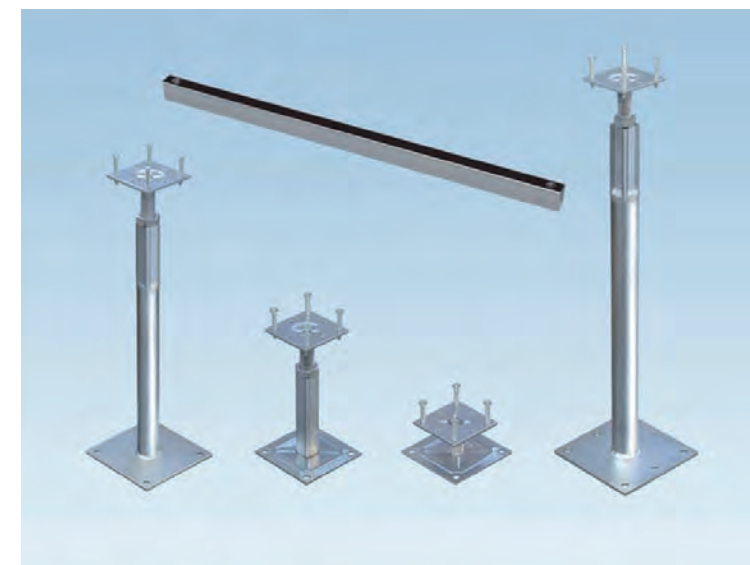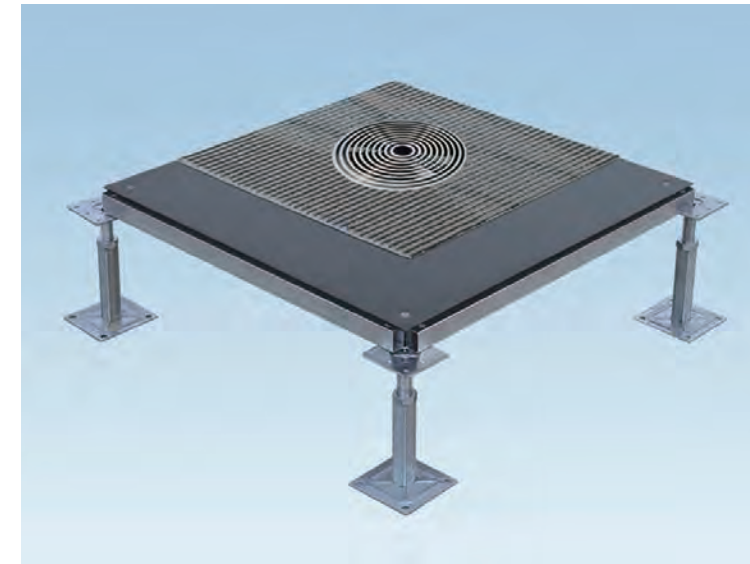

Bare Finished SteelCrete Panel + Bolted Stringer System

- Dimension: 600mm x 600mm or 24" x 24".
- SteelCrete panel grades: SC800, SC1000, SC1250.
- Used with TROX® Floor Diffuser.

Bolted Stringer System

- Finished floor heights: 150mm ~ 1200mm.
- PVC taped rectangular stringer provides excellent loading and air-tightness performance.
- SteelCrete Access Floor is Zinc Whisker Free.

TROX® Floor Diffuser

- TROX® floor diffusers type FB can provide comfortable and energy efficient air discharge into the space, by complimenting existing upward convection streams present in the occupied zone. This principle allows the local heat loads to be targeted directly.
- TROX® floor diffusers type FB can be used with SteelCrete Access Floors for Underfloor Air Distribution applications.




Aesthetical And Functional Finishes



HPL And Vinyl Finishes

- One of the advantages of a raised access floors is that it is fitted dry to overcome any difficulties on the building's floor slab.
- By offering a wide variety of aesthetical and functional finishes, it is an extremely versatile system which gives the designer great freedom of action.

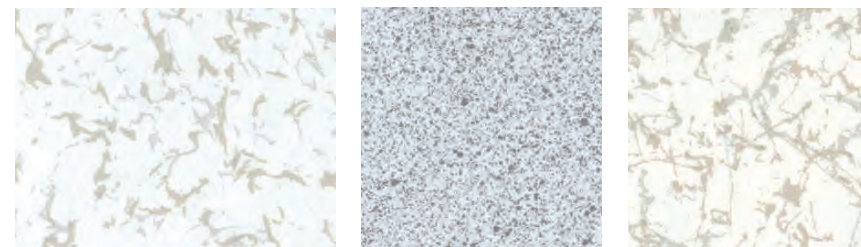

HPL2010

HPL2103

HPL2010-6




HPL2158

HPL2069


HPL2208

Dowseng® Dissipative HPL Tile


- Thickness: 1.6 mm
- Electrical Resistance: $1 \times 10^6 - 2 \times 10^{10}$ Ohm




C6101




C6061




C6091



C601



C6181



C6131

LG® ESD Control Vinyl Tile

- Thickness: 2.0 mm
- Electrical Resistance: $2.5 \times 10^4 - 1 \times 10^6$ Ohm



0112-Storm




0002-Platinum



0005-Steel



0306-Green



0013-Pewter



0006-Honey

Gerflor® MIPOLAM ESD Control Vinyl Tile

- Thickness: 2.0 mm
- Electrical Resistance: $1 \times 10^6 - 1 \times 10^9$ Ohm



Dowseng Limited

Address: Xiyou Town, Laizhou City, Shandong, China 261418

Tel: +86-535-274-3443

Fax: +86-535-274-3449

Website: www.dowseng.com

Email: info@dowseng.com